

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPH 80/65 S



Maximum longevity

Full protection hood - engine and components protected all around



Safe operation

Radio/cable remote control or cable remote control




More transparency

Integrated diagnostic module with fault code display

Shipping dimensions in m3

BPH 80/65 S

0,702

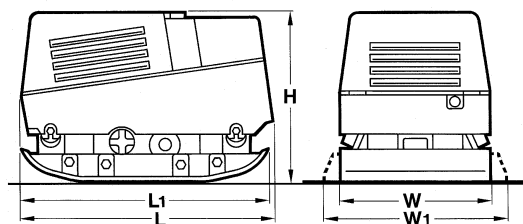

Standard Equipment

- ☒ Hydrostatic drive
- ☒ Combination remote control cable/radio
- ☒ Electric starter
- ☒ Engine protection hood
- ☒ Highly wear resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Lockable engine cover and dash board
- ☒ Single point lifting device , foldable
- ☒ Battery disconnect switch
- ☒ Easy Service Concept
 - Diagnostic module with fault code display
 - Hour meter
 - foldable full protection hood
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Special painting
- ☐ Mobile quick charger
- ☐ Service Kit
- ☐ Tool kit
- ☐ TOUGH WARRANTY

Dimensions in mm

	H	L	L1	W	W1
BPH 80/65 S	785	1118	1088	650	800

Technical Data

BOMAG BPH 80/65 S

Weights

Operating weight CECE (W)	kg	707
Operating weight CECE (W1)	kg	750
Basic weight	kg	745

Dimensions

Basic working width	mm	800
Lowest passing height	mm	785

Driving Characteristics

Working speed, max.	m/min	28
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Hatz	
Type	1D 90 W	
Emission stage	Stage V	
Cooling	air	
Number of cylinders	1	
Performance ISO 3046	kW	10,9
Speed	min-1	3.000
Drive system	hydraulic	
Fuel	Diesel	
Fuel comsump. aver. during operation	l/h	2,5

Exciter system

Frequency	Hz	55
Amplitude	mm	1,80
Centrifugal force	kN	80

Capacities

Fuel	l	10,0
Hydraulic	l	25,0

Technical modifications reserved. Machines may be shown with options.



PRE 700 15 010

300120 Sa03

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

